

PIONEER SUBMERSIBLE PUMPS

DRAINING SAND-CARRYING WATER IN CONSTRUCTION AND CIVIL ENGINEERING WORKS



PIONEER

SUBMERSIBLE DEWATERING PUMP PM-400



Model	Power HP	Voltage V/Hz	DISCHARGE INCH	MAX	
				HEAD/M	FLOW/LPM
PM-400	1/2	220V/50Hz	2"	12	200


PUMP BODY: ALUMINUM

SHAFT: STAINLESS STEEL

BASE: A.B.S.

IMPELLER: A.B.S.

Performance Curve

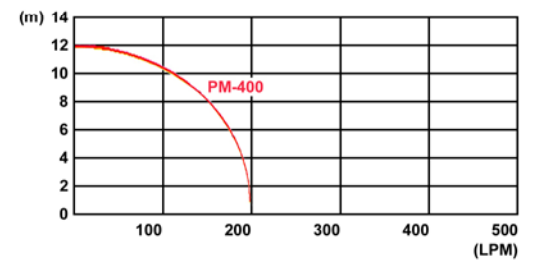

SUBMERSIBLE DEWATERING PUMP PM-400



Model	Power HP	Voltage V/Hz	DISCHARGE INCH	MAX	
				HEAD/M	FLOW/LPM
PM-400	1/2	110V/50Hz	2"	12	200


PUMP BODY: ALUMINUM

SHAFT: STAINLESS STEEL

BASE: A.B.S.

IMPELLER: A.B.S.

Performance Curve

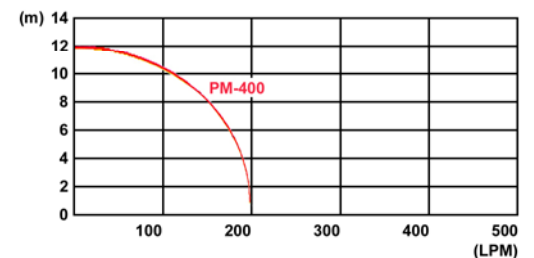

SUBMERSIBLE DEWATERING PUMP WITH FLOAT SWITCH PM-400A



Model	Power HP	Voltage V/Hz	DISCHARGE INCH	MAX	
				HEAD/M	FLOW/LPM
PM-400A	1/2	220V/50Hz	2"	12	200

PUMP BODY: ALUMINUM

SHAFT: STAINLESS STEEL

BASE: A.B.S.

IMPELLER: A.B.S.

Performance Curve

